

# CARRE

**TYPE:**

Wall/Ceiling

**PROJECT NAME:**


MODEL #	SHADE COLOR	FIXTURE HEIGHT	HALO	LED	VOLTAGE
---------	-------------	----------------	------	-----	---------

120V



SHADE OPTIONS

ST = STANDARD ALUMINUM

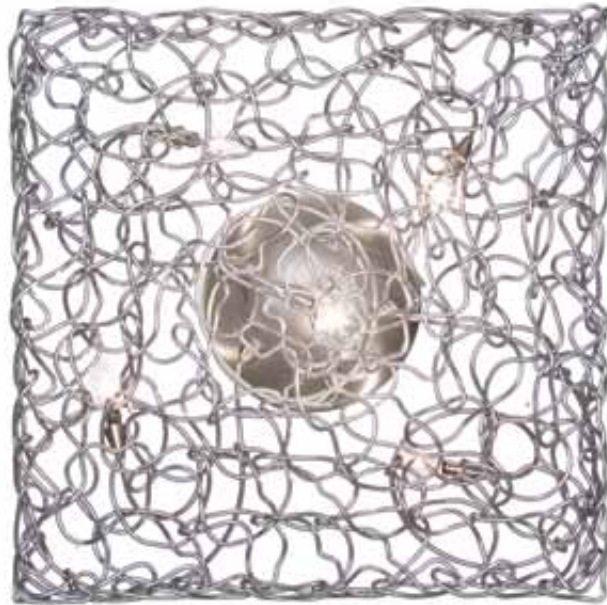


MODEL - CARRE WL/PL 3

LIGHT SOURCE OPTIONS

H = HALOGEN - 3 x 20W 12V G4  
or  
L = LED - 3 x 1.5W 12V 2700K WW  
100 Lumens each LED 30,000 hours

SPECIFICATION SHEET



25cm  
(9.8")

25cm  
(9.8")

HARCOLOOR DESIGN

DIMMING NOTE:

HALOGEN VERSION - Dimmable with a Low-Voltage Electronic dimmer.  
LED VERSION - Dimmable with a leading edge or trailing edge TRIAC dimmer.

A SCANGIFT® BRAND

WWW.HARCOLOORLIGHTING.COM

# CARRE

**TYPE:**

Wall/Ceiling

**PROJECT NAME:**


MODEL #	SHADE COLOR	FIXTURE HEIGHT	HALO	LED	VOLTAGE
					120V



SHADE OPTIONS

ST = STANDARD ALUMINUM


MODEL - CARRE WL/PL 5



LIGHT SOURCE OPTIONS

H = HALOGEN - 5 x 10W 12V G4  
 or  
 L = LED - 5 x 1.5W 12V 2700K WW  
 100 Lumens each LED 30,000 hours

MODEL - CARRE WL/PL 7



LIGHT SOURCE OPTIONS

H = HALOGEN - 7 x 10W 12V G4  
 or  
 L = LED - 7 x 1.5W 12V 2700K WW  
 100 Lumens each LED 30,000 hours

SPECIFICATION SHEET



DIMMING NOTE:

HALOGEN VERSION - Dimmable with a Low-Voltage Electronic dimmer.  
 LED VERSION - Dimmable with a leading edge or trailing edge TRIAC dimmer.